

# ARCA 304015



Sample image

**Order symbol :** ARCA 304015

**Product nr :** 8120022

UL Code : UL508A

**Description :** Cabinet, PC


**Remarks :** Grey cover, 2-point locking, hinges on the short side

**EAN :** 6418074079336

**El. number :**

- Finland : 3423119
- Denmark : 8212091207
- Sweden : 2500111

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

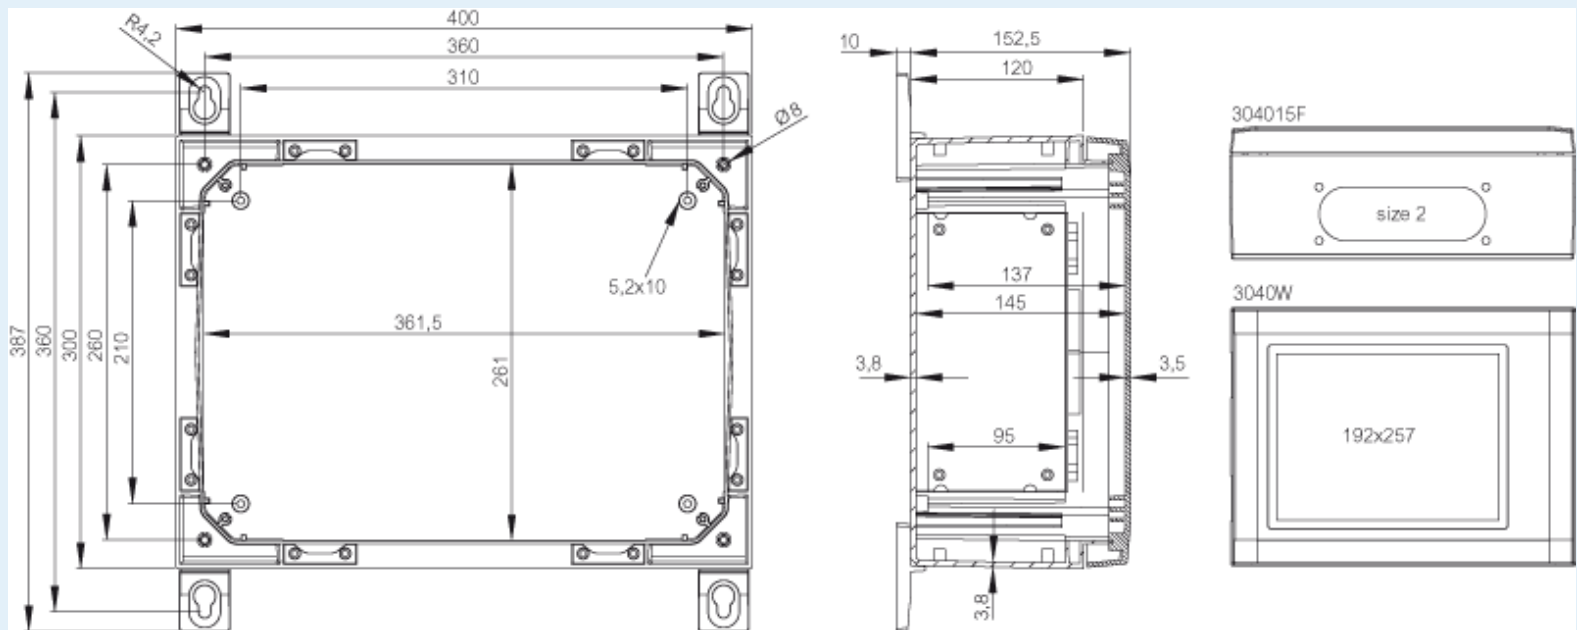

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 300    | 400   | 150   |
| inch :       | 11.81  | 15.75 | 5.91  |

**Materials :**

Material : Polycarbonate

**Accessories :**

|                 |   |
|-----------------|---|
| DRS ARCA 304015 | DIN rail frame set (385 x 285 x 35)         |
| SBK ARCA 30     | Support bar kit (235 x 40 x 30)             |
| DSP ARCA HRS    | Door stopper ARCA, horizontal, right, small |
| DSP ARCA HLS    | Door stopper ARCA, horizontal, left, small  |

|                   |                      |
|-------------------|----------------------|
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

#### Temperatures :

|                               |             |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

|                |   |
|----------------|---|
| SBK ARCA 40    | Support bar kit<br>(340 x 40 x 30)                                      |
| IDS ARCA 3040  | Inner door set  |
| RCS ARCA 3040  | Rain canopy set for size 3040   |
| PMK ARCA 40    | PoleMounting kit, for pole $\varnothing$ 100-300mm<br>(385 x 285 x 35)  |
| MPP ARCA 3040  | Mounting plate perforated (350x250x2 mm -<br>26x11 mm)                  |
| MPMP ARCA 4030 | Mounting plate multiperforated (350x250x2<br>mm - $\varnothing$ 3.6 mm) |
| MPS ARCA 4030  | Mounting plate (350x250x2 mm)<br>(350 x 250 x 2)                        |
| MPX ARCA 4030  | Mounting plate (350x250 mm)<br>(350 x 250 x 15)                         |

#### Ratings :

|   |                    |
|---|--------------------|
| Ingress protection (EN 60529):          | IP66;              |
| Impact Resistance (EN 62262):           | IK10;              |
| electrical_insulation :                 | Totally insulated  |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes                |
| UV resistance :                         | UL 508             |
| Flammability Rating :                   | UL 94 5VA          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C               |
| NEMA Class                              | NEMA__1_4_4X_12_13 |

#### Certificates :

Certificate FI 40467