

ARCA 608030



Sample image

Order symbol : ARCA 608030

Product nr : 8120029

UL Code : UL508A

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074085160

El. number :

- Finland : 3424064
- Denmark : 8212095368
- Sweden : 2500121

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

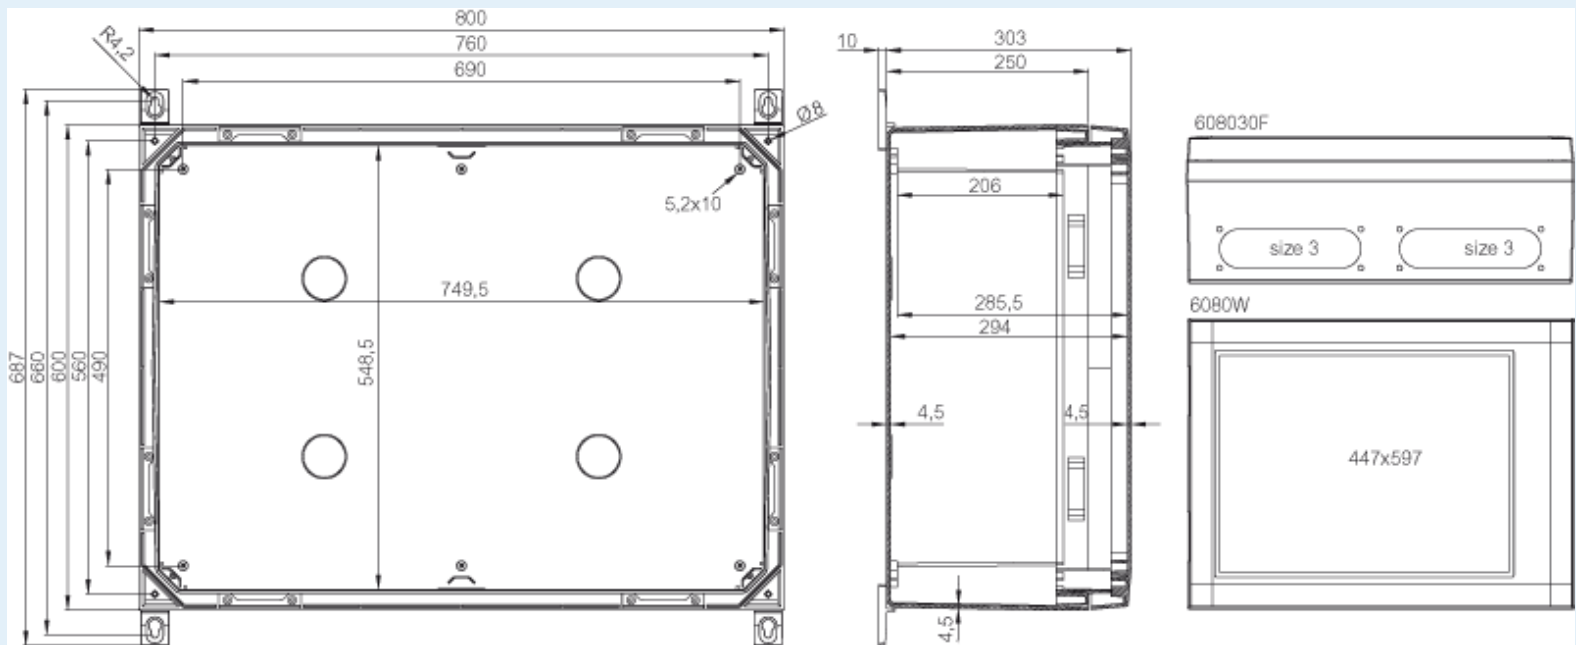

Dimensions :	Height	Width	Depth
mm :	600	800	300
inch :	31.5	23.62	12.2

Materials :

Material : Polycarbonate

Accessories :

DRS ARCA 608030	DIN rail frame set (785 x 585 x 35)
RCS ARCA 6080	Rain canopy set for size 6080
DSP ARCA RM	Door stopper ARCA, right, midsize 5070-8060
MPS ARCA8060	Mounting plate (730x530x2 mm)

Base colour : RAL_7035
Cover colour : RAL 7035 -light grey
Gasket material : Polyurethane

Temperatures :

Temperature °C (short term) : -40 ... 120
Temperature °C (continuous) : -40 ... 80
Temperature °F (short term) : -40 ... 250
Temperature °F (continuous) : -40 ... 175

DSP ARCA LM Door stopper ARCA, left, midsize 5070-8060
IDS ARCA 6080 Inner door set
MPMP ARCA 8060 Mounting plate multiperforated (730x530x2 mm - ø3.6 mm)
SBK ARCA 80 Support bar kit (715 x 50 x 30)
SBK ARCA 60 Support bar kit (535 x 40 x 30)
PMK ARCA 80 PoleMounting kit, for pole ø100-300mm (785 x 585 x 35)
MPP ARCA 6080 Mounting plate perforated (730x530x2 mm - 26x11 mm)
MPX ARCA 8060 Mounting plate (730x530 mm)

Ratings :

Ingress protection (EN 60529): IP66;
Impact Resistance (EN 62262): IK10;
electrical_insulation : Totally insulated
Halogen free (DIN/VDE 0472, Part 815) : Yes
UV resistance : UL 508
Flammability Rating : UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C : 960C
NEMA Class NEMA__1_4_4X_12_13

Certificates :

Certificate FI 40467