

# ARCA 405021W

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** ARCA 405021W

**Product nr :** 8120145

UL Code : UL508A

**Description :** Cabinet, PC


**Remarks :** Grey cover with window, 2-point locking, hinges on the short side

**EAN :** 6418074080165

**El. number :**

- Finland : 3423224
- Denmark : 8212092015
- Sweden : 2500143

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

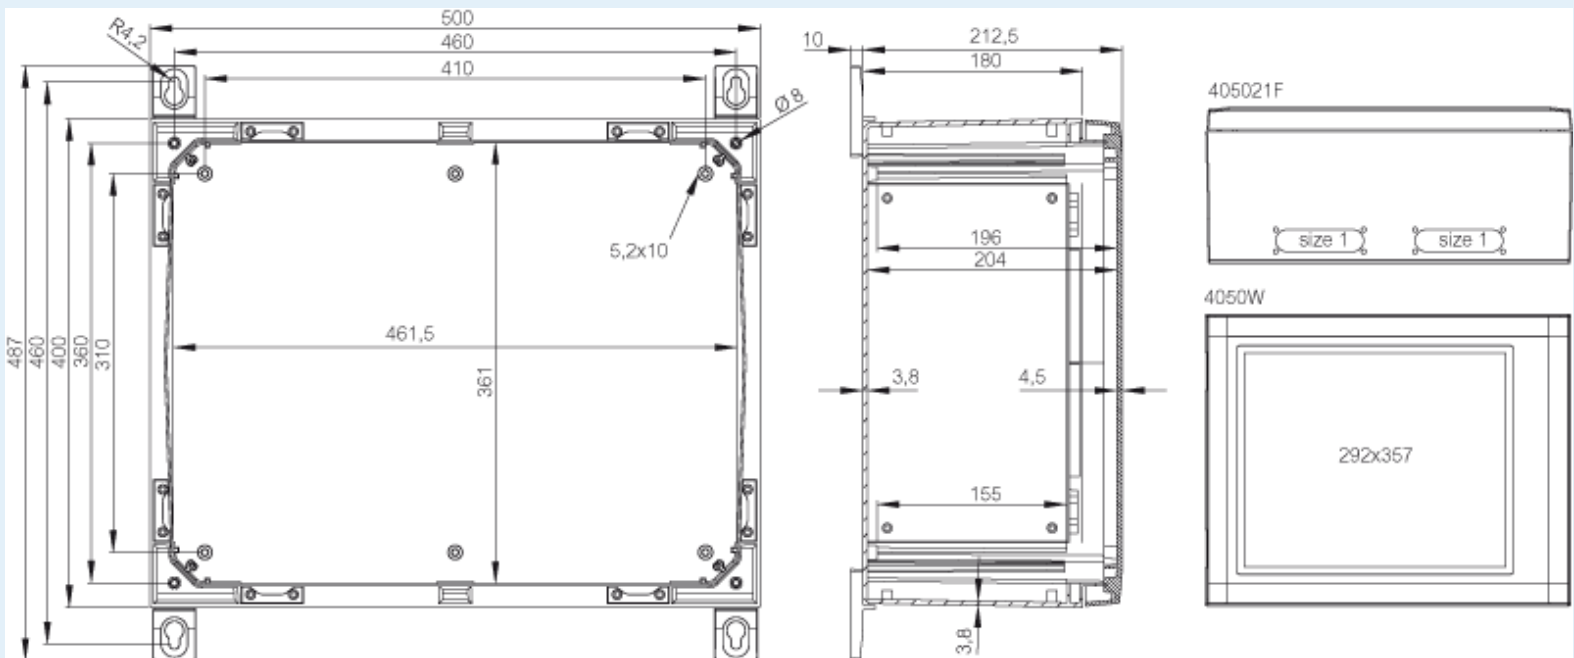

Dimensions :	Height	Width	Depth
mm :	400	500	210
inch :	15.75	19.69	8.27

**Materials :**

Material : Polycarbonate

**Accessories :**

SBK ARCA 50	Support bar kit (435 x 40 x 30)
MPX ARCA 5040	Mounting plate (450x350 mm) (450 x 350 x 15)
MPMP ARCA 5040	Mounting plate multiperforated (450x350x2 mm - ø3.6 mm)
DSP ARCA	Door stopper ARCA, horizontal, right, small

Base colour :	RAL_7035
Cover colour :	Clear transparent
Gasket material :	Polyurethane

#### Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

HRS	
DRS ARCA 405021	DIN rail frame set (485 x 385 x 35)
DSP ARCA HLS	Door stopper ARCA, horizontal, left, small
SBK ARCA 40	Support bar kit (340 x 40 x 30)
MPP ARCA 4050	Mounting plate perforated (450x350x2 mm - 26x11 mm)
MPS ARCA 5040	Mounting plate (450x350x2 mm) (450 x 350 x 2)
PMK ARCA 50	PoleMounting kit, for pole ø100-300mm (485 x 385 x 35)
IDS ARCA 4050	Inner door set
RCS ARCA 4050	Rain canopy set for size 4050

#### Ratings :

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 508
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960C

#### Certificates :

Certificate FI 40467